


**Aluminum Foil Tape with
Non Conductive Adhesive
NKS-060AFTN**

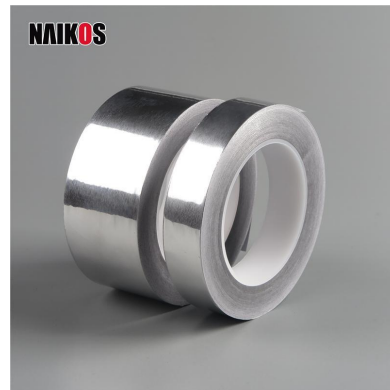

Product Description:

- * The tape consisting a aluminum foil backing coated with acrylic pressure sensitive adhesive

Product Features:


- * Heat preservation, heat insulation
- * Waterproof, cold and heat resistance
- * Strong adhesion and easily peeled off
- * EMI shielding
- * UV resistance, flame retardant
- * Moisture resistance, chemical and corrosion resistance
- * Ideal for outdoor application and durable

Application:


- * Single conductive
- * Eliminate the effect of EMI
- * Avoid unnecessary current and voltage
- * Ideal for transformer, mobile phone, computer, PDA, PDP, and LCD monitor, PC, copier etc.
- * Self adhesive aluminum foil tape used in fridge, air conditioner, automotive, bridge, hotel, electronic industry etc.

Construction:

Aluminum Foil
Non Conductive Acrylic Adhesive
Releasing Paper

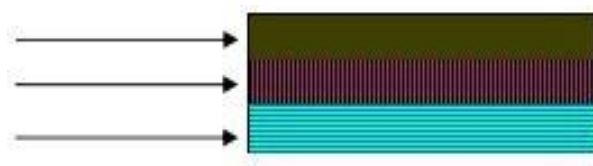


Aluminum Foil Tape with
Non Conductive Adhesive
NKS-060AFTN

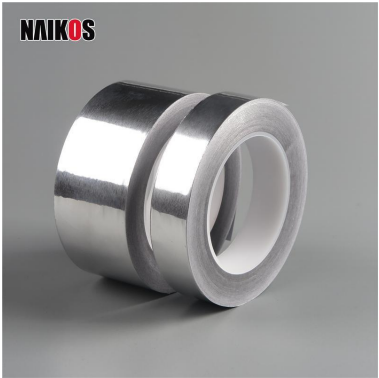

Properties:

Item	NKS-060AFTN
Color	Silver
Carrier	Aluminum Foil
Adhesive	Non Conductive Acrylic Adhesive
Carrier Thickness(mm)	0.025
Total Thickness (mm)	0.06 ± 0.005
Appearance	Excellent, no oxidation
Initial Tack(kg/1’')	1
Holding Power(1kg/h)	48
Adhesion to Steel (kg/1’)	0.8
Application Temperature	-10~120℃
Storage Condition	25℃,65% RH
Specification	
Length(m)	50/100
Width(mm)	2~1200 (custom slit)

These values are measured values and not guaranteed value

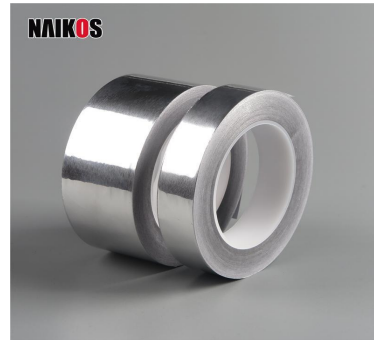NAIKOS**厦门奈克斯新材料有限公司****Xiamen Naikos New Materials Co., Ltd.****Aluminum Foil Tape with****Non Conductive Adhesive****NKS-060AFTN*****Storage Conditions:***

Store in a clean dry shady place. Temperature of 20 degrees Celcius and 65 percent relative humidity are recommended.

Notice: All physical properties, statements, and recommendations are based either on tests we believe to be reliable or our experience, but they are not guaranteed. Naikos recommends each user determine the suitability of the product for the intended purpose.

Warranty and Limited Remedy: The following warranty is made in line of all other warranties, express or implied, including, but not limited to, any implied warranty of merchantability or fitness for a particular purpose, and any implied warranty arising out of a course of dealing, custom or usage of trade.

Naikos warrants its tape will be free from defects in material and manufacturer. If a tape is proved to be defective, then the exclusive remedy, and Naikos' and seller's sole obligation shall be, at Naikos' option, to replace the quantity of the tape which is proved to be defective or to refund the purchase price.

Limitations of Liability: Except where prohibited by law, Naikos will not be liable for any loss or damage arising from the Naikos' product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

The forgoing Warranty and Limited Remedy and Limitation of Liability may be changed only by a written agreement signed by authorized officers of Naikos and seller.

Xiamen Naikos New Material Co., Ltd.

Tel: +86-592-7368007

Fax: +86-592-7368007

Email: ocs9@xmns.comWeb: www.xmnks.com

Add: No.48, Huli Industrial Park, Meixi Street, Tong'an District, Xiamen, CHINA 361100